


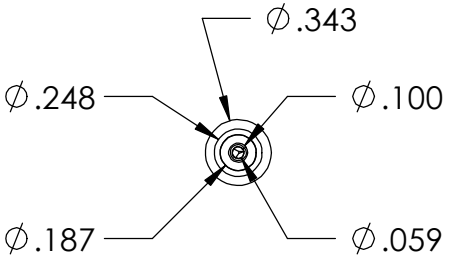


NOTES:
1. 600°F MAX
2. 32" STAINLESS STEEL BRAIDED LEAD

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRONIC DEVELOPMENT LABS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRONIC DEVELOPMENT LABS IS PROHIBITED.

Revision History

| REV | Description | Date | By: |
|---|---|---|---|
| 0 | ISSUED | 8/8/2016 | LB |
| | | | |
| | | | |
| | | | |
| | | | |

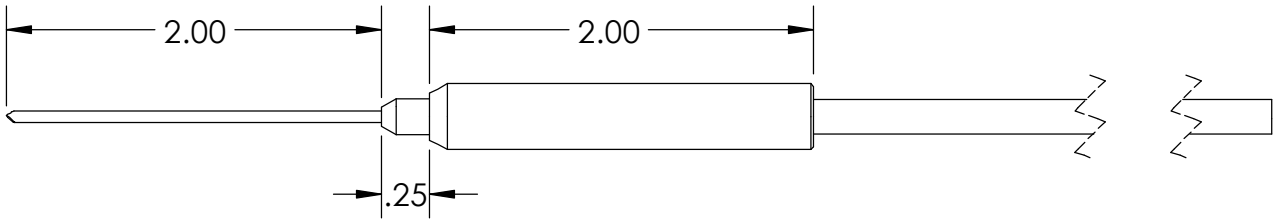UNLESS OTHERWISE SPECIFIED:

TOLERANCES:

FRACTIONAL ± 1/64
ANGULAR: MACH ± 1°
BEND ± 1°
TWO PLACE DECIMAL ±.02
THREE PLACE DECIMAL ±.005

RAW MTRL NOTES:

MATERIAL:
STAINLESS STEEL/CERAMIC

FINISH:

"The Temperature People"
ELECTRONIC DEVELOPMENT LABS. INC.
& E. D. L. TOOL & DIE
244 Oakland Drive, Danville VA, 24540

TITLE:

NH-06GSOKK2M NEEDLE SENSOR

| SIZE | DWG. NO. | REV |
|---|---|---|
| A | NH06GSOKK2M | 0 |

SCALE: 1:1 | UNITS: INCHES | SHEET 1 OF 1

5 4 3 2 1